

CG-19 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:

- Double-faced tape
- Undrilled (fastening method by others)

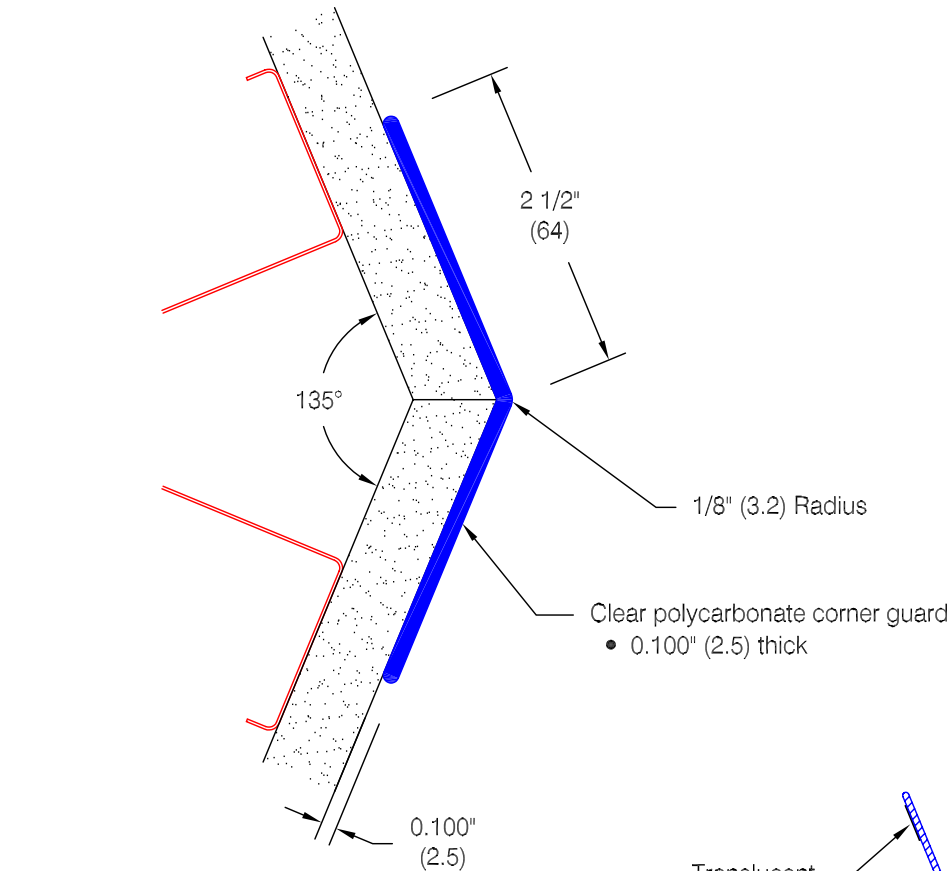

#6 x 1" (25) oval head chrome plated sheet metal screw (ABSS-130-0-443)

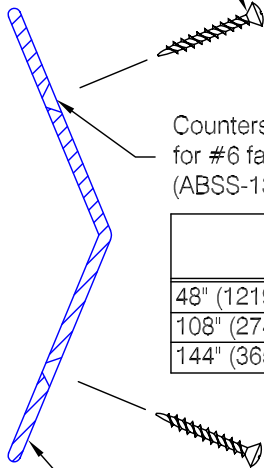

Length	Total # of Screws
48" (1219) thru 107" (2718)	6
108" (2743) thru 143" (3632)	8
144" (3658)	10


Translucent double-faced tape factory applied

Optional Tape Mounted

(Specify CGT-19)

Optional Undrilled

(Specify CGU-19)

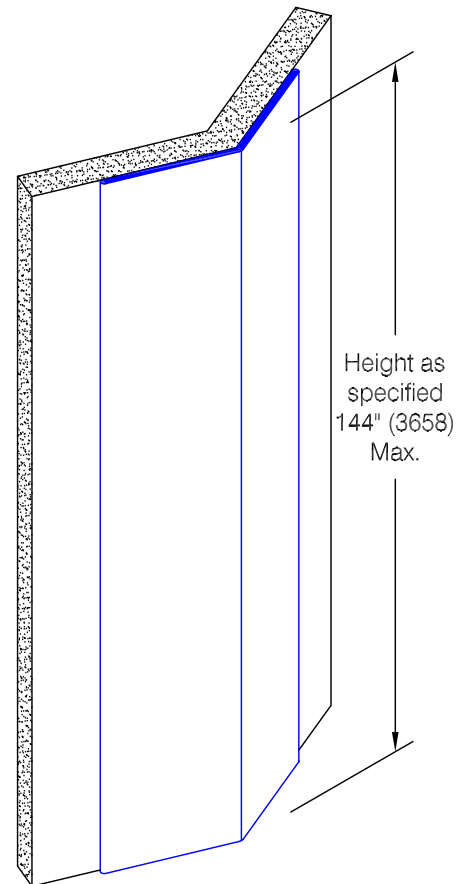

Standard Screw Mounted

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.116.0b
Architect :	Sales Rep :	