


Pro•Tek® Wall Protection Systems

Architectural Building Products Since 1945

CG-23 Clear Polycarbonate Corner Guard

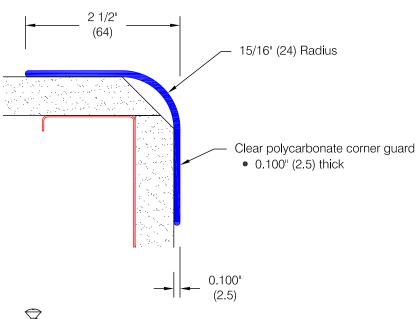

Features:

- Extruded Polycarbonate
- U/L 94 Flammability:

V-2 @ 0.125

V-2 @ 0.0625

V-0 @ 0.2500

- Stock lengths 4'-0" (1219) and 8'-0" (2438) Custom lengths available
- Mechanical fasteners

Finishes:

- Clear #132 smooth finish
- Manufacturer's standard colors (optional)


Height as

specified


144" (3658) Max.

Mounting Options:


- Double-faced tape
- Undrilled (fastening) method by others)

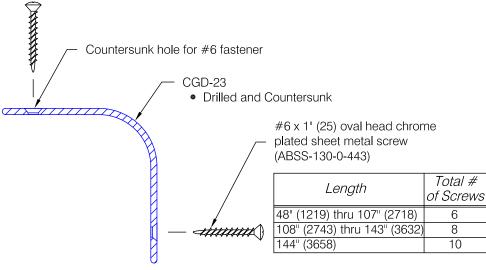

Standard Screw Mounted



Optional Tape Mounted (Specify CGT-23)



6

8

10

Optional Undrilled (Specify CGU-23)

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer:	Project :	WD.118.0c
Architect :	Sales Rep :	