


PEW-212 Recycled Wall Guard

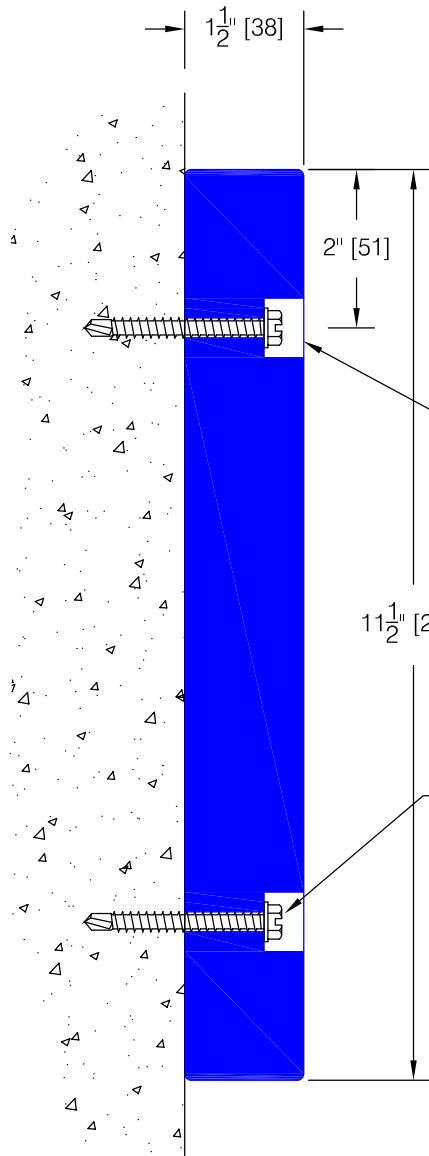

3/4" [19] Dia counterbore*
 • By others

Fasteners *

- Not to exceed 16" [406] on center
- Supplied separately if required
- Suggested concrete hardware:
 1/4" [6] x 3" [76] Tapcon with
 Hex-Washer head

Features:

- Extruded 97% Post-Consumer HDPE
- Density: (ASTM D6111) .0216-.0275 lbs/cu-in
- Screw Withdrawal: (ASTM D6117 7)
 90 lbs (#10 x 1 1/2")
- Water Absorption, 11 weeks: (ASTM D570)
 less than 0.1%
- Coefficient of Linear Expansion: (ASTM D6341)
 .000064 in/in/°F
- Stock length: 12'-0" [3658]

Standard Color:


- Manufacturer's standard colors
- UV Inhibited pigments

* Wall Guard is supplied undrilled and with no mounting hardware. Hole spacing shown is for reference only and applies to bumpers 48" [1219] and longer.

Not Less Than 2" [51] or More Than 8" [203]

Not to Exceed 16" [406] Typ

Holes shown for reference only. Product is supplied undrilled.

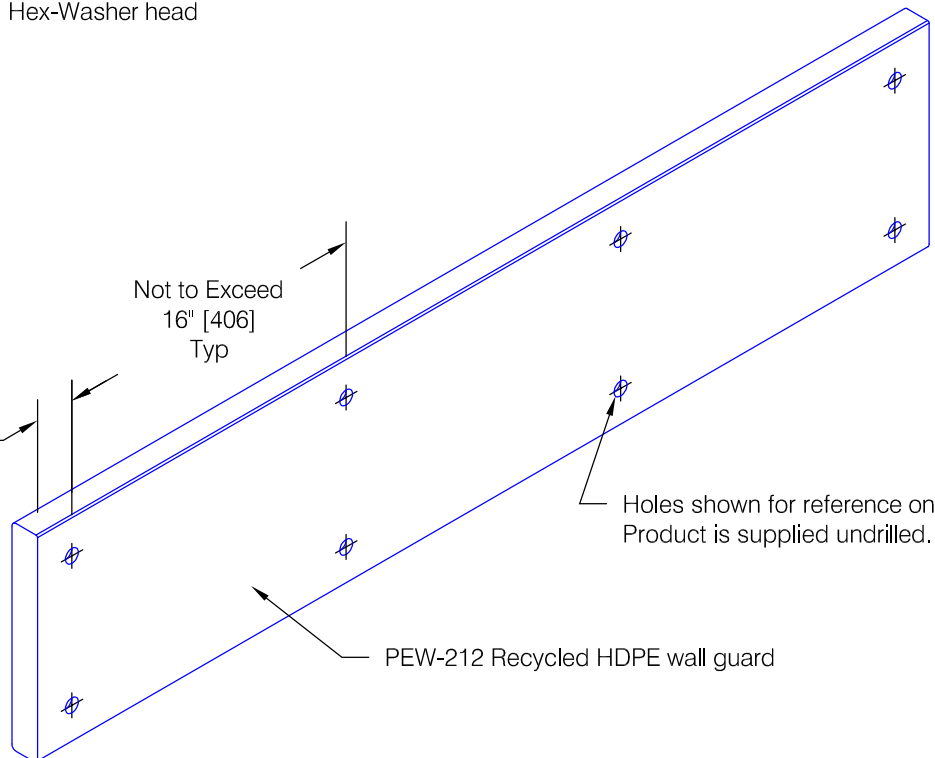

PEW-212 Recycled HDPE wall guard

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.164.0b
Architect :	Sales Rep :	